

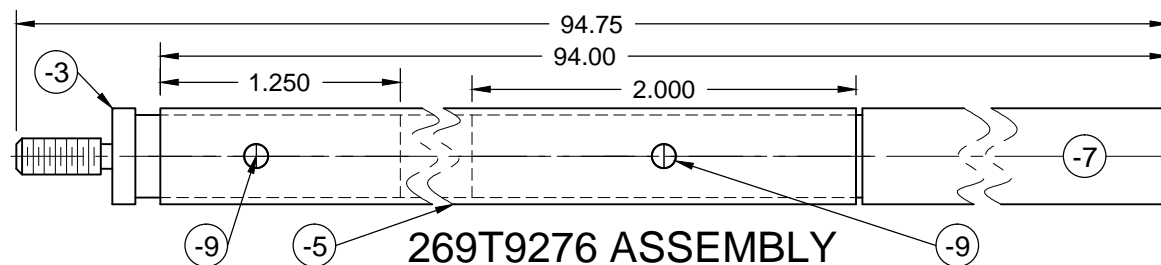


REVISIONS				
REV	DESCRIPTION	DATE	INITIAL	APPROVE
—	—	—	—	—

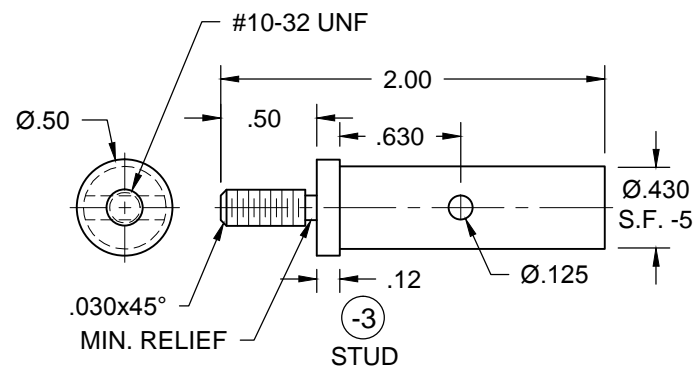

CUSTOMER
INSTALLED

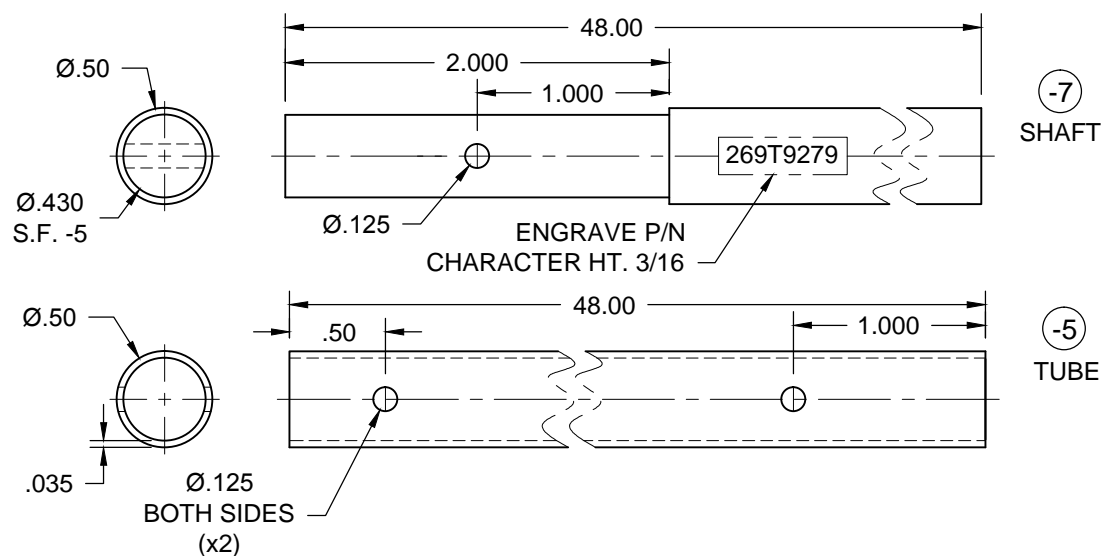

NOTES

1. BLACK ANODIZE -5 TUBE & -7 SHAFT.
2. BLACK OXIDE -3 STUD.

ASSY QTY	ASSY QTY	B/O	PART #	TOTAL QTY	DESCRIPTION	MAT.	B/O INFORMATION SPECIFICATIONS OR
			-3	1	STUD RND. BAR	1018	Ø1/2 x 2
			-5	1	TUBE ALUMINUM TUBING		Ø1/2 OD. x .035 wall x 48
			-7	1	SHAFT RND. BAR	6061	Ø1/2 x 48
			-9	2	ROLL PIN	STEEL	Ø1/8 x 1/2
	ASSY #						

<div><div>RB</div>RED BARN MACHINE</div>												
TITLE INSTALLATION ROD; TAIL ROTOR DRIVE SHAFT DAMPER												
DWG NO. 269T9276					REV							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES					DRAWN BY: PERRITT							
TOLERANCES ON: DECIMALS .XXX ± .005 .XX ± .01 .X ± .1					APPROVED							
FRACTIONS ± 1/32 ANGLES ± 5°					HEAT TREAT FINISH SPEC							
UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES 015 x 45° PR. 015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING					USED ON MODEL							
SCALE		NTS			DATE		11-13-07		SHEET		1 of 1	

REVISIONS				
REV	DESCRIPTION	DATE	INITIAL	APPROVED
—	—	—	—	—

ASSY QTY	ASSY QTY	B/O	PART #	TOTAL QTY	DESCRIPTION	MAT.	B/O INFORMATION SPECIFICATIONS OR	Pg.	TITLE
			-1	1	RND	6061	Ø8-1/4 x 3-7/8	2	---
									DWG NO. 269T9276 REV
									UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
									TOLERANCES ON: DECIMALS .XXX ± .005 FRACTIONS ± 1/32 .XX ± .01 ANGLES ± 5° .X ± .1
									DRAWN BY: PERRITT APPROVED HEAT TREAT FINISH SPEC
									USED ON MODEL
									UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING
	ASSY #								SCALE NTS DATE 8-15-07 SHEET 1 of 1

